



Adsorption Studies on Direct Yellow 17 by Varying the Concentration of MgO in Sorel's Cement

R. Hariharasuthan,¹A. Nageswararao,²A. Bhaskaran

Research Scholar, Sathyabama University, Chennai 600 119, INDIA

¹Professor, Department of Chemistry, Sathyabama University, Chennai 600119, INDIA

²Professor, Department of Applied Physics, Sri Venkateswara College of Engineering, Sriperumbudur 602 105, INDIA

ABSTRACT

Batch experiments are carried out for the adsorption of Direct Yellow 17 by Sorel's cement with varying the composition. The operating variables studied are initial dye concentration (C_i), pH, temperature and contact time. The equilibrium data are fitted to the Langmuir isotherm equations. From this the adsorption efficiency, adsorption capacity and dimensionless separation factor are calculated.

Keywords: Direct Yellow 17, Various types of Sorel's Cement, Langmuir isotherms, Kinetic studies, pH effect, Effect of contact time.

1. INTRODUCTION

The discharge of untreated effluents into nearby water bodies or nearby land is not only aesthetically displeasing, but it also restricts light penetration, thus upsetting biological processes within a stream. In addition, many dyes are toxic to some organisms causing direct destruction of aquatic communities. Some dyes can cause allergic dermatitis, skin irritation, cancer and mutation in man. Recent estimates indicate that, approximately, 12% of synthetic textile dyes used each year is lost during manufacture and processing operation and 20% of these dyes enter the environment through effluents that result from the treatment of residual industrial waters^[1]. Effluents from dyeing industries are released into nearby land or rivers without any treatment because the conventional treatment or methods are not cost effective in the Indian context. On the other hand, low cost technologies never allow an effective color removal and also have certain disadvantages. The adsorption is one of the most effective methods and Sorel's cement is used as adsorbent to treat effluent containing different classes of dyes, recognizing the economic drawback of commercial Sorel's cement.

Many researchers have studied the feasibility of using inexpensive alternative materials like coconut husk^[2], pearl millet husk, date pits, saw dust, buffing dust of leather industry^[3], coir pith, crude oil residue, tropical grass, olive stone and almond shells, pine bark, wool waste, etc., as carbonaceous precursors for the removal of dyes from water and wastewater^[3,4]. The present study is undertaken to evaluate the efficiency of Sorel's cement by varying the concentration of MgO by keeping the constant strength of $MgCl_2$ and $FeCl_3$, for removal of Direct Yellow 17 dye in an aqueous solution. In order to design on adsorption treatment system, knowledge of the kinetic and mass transfer processes is essential. In this paper, we report the applicability of kinetic models for the adsorption of Direct Yellow 17 (DY17) onto Sorel's cement by varying concentration of MgO.

2. MATERIALS AND METHODS

Materials

Sorel's cement X: 2.4 gm of MgO is dissolved in 8 ml of 1.78 mol $MgCl_2$ solution at 75 °C, then add 1 gm of $FeCl_3$ and stir the mixture for 10 minutes. Remove the paste and centrifuge and dry the paste in IR lamp for 4 hrs. Sieve this powder in 35 μm dia mesh. The properties of the Sorel's Cement used are given in Table 1. All chemicals used were of high purity, commercially available Analar grade. Stock solutions of 1g/L of dyes were prepared using doubly distilled water. The same procedure is repeated with 1.8 gm of MgO for **Sorel's cement A type** and 3.0 gm of MgO for **Sorel's cement B type** adsorbents.

Methods

Direct Yellow 17 (DY 17) dyes solutions were made to a known concentration of 25 mg/L, 50 mg/L, 75 mg/L and 100 mg/L. From that, 50 ml of 25 mg/L, 50 mg/L, 75 mg/L and 100 mg/L dye solutions were taken and loaded with the 100 mg of adsorbents viz, Sorel's cement X, Sorel's cement A and Sorel's Cement B. Then the samples were agitated at 30°C, 40°C, 50°C and 60°C in definite time intervals. After that samples were withdrawn from the agitator and filtered. Adsorption studies were carried out using the various types of Sorel's cement. The Sorel's cement X, A and B loaded with DY 17 were separated and gently washed with distilled water to remove any unabsorbed dye. Each of the dye-laden Sorel's cement was agitated with 50 ml of water.

3. RESULTS AND DISCUSSIONS

Effect of contact time and initial dye concentration

The experimental results of adsorptions of Direct Yellow 17 (DY17) on the Sorel's cement X at various



initial concentrations (25 mg/L, 50 mg/L, 75 mg/L and 100 mg/L) with known contact time are shown in Figure 7. The equilibrium data are collected reveal that the percent adsorption decreases with the increase in initial dye concentration, but the actual amount of dye adsorbed per unit mass of all types of Sorel's cement increased with increase in dye concentration. It means that the adsorption is highly dependent on the initial concentration of dye. This is because at lower concentration, the ratio of the initial number of dye molecules to the available surface area is low, subsequently, the fractional adsorption become independent on the initial concentration. However, at high concentration the available sites of adsorption becomes fewer, and hence, the percentage removal of dye is dependent upon the initial concentration. The equilibrium is established in 60 min for the Sorel cement B with high concentration of MgO is showing more efficiency in removing DY17 whereas same condition is reached in 80 mins in the case of the other types of Sorel Cement adsorbents. Figure 7 reveals that the curves are smooth, continuous and leading to saturation, suggesting the possible monolayer coverage of the dyes on various types of Sorel's cement [5].

Adsorption isotherm

The experimental data are analyzed according to the linear form of the Langmuir isotherms. The Langmuir isotherm is represented by the following equation [6].

$$C_f/Q_e = 1/Q_m b + C_f/Q_m \dots \dots \dots (1)$$

Here C_f is the equilibrium concentration (mg/L), ' Q_e ' is the amount adsorbed at equilibrium (mg /g) and ' Q_m ' and ' b ' is Langmuir constants related to the adsorption efficiency and energy of adsorption, respectively. The linear plots of ' C_f/Q_e ' versus ' C_f ' suggest the applicability of the Langmuir isotherms (Figure 4 to Figure 6). The values of ' Q_m ' and ' b ' are determined from the slope and intercept of the plots and are presented in Table 4. From the results, it is found that, for all combinations of Sorel's Cement, the values of adsorption efficiency ' Q_m ' and adsorption energy ' b ' are varying with increase in the temperature. From the values we can conclude that the maximum adsorption corresponds to a saturated mono-layer of adsorbate molecules on an adsorbent surface with constant energy and no transmission of adsorbate in the plane of the adsorbent surface occurs. The trend shows that the adsorbent prefers to bind acidic ions and that speciation predominates on sorbent characteristics, when ion exchange is the predominant mechanism. Further, it

confirms the endothermic nature of the processes involved in the system. To confirm the favorability of the adsorption process, the separation factor (R_L) is calculated and presented in Table 5. The values are found to be between 0 and 1 and confirm that the ongoing adsorption process is favorable [7, 8].

$$R_L = 1 / (1 + bC_i) \dots \dots \dots (2)$$

Here, ' b ' is the Langmuir constant and ' C_i ' is the initial concentration of dye.

Effect of pH

The experiments carried out at different pH show that there is a change in the percent removal of dyes over the entire pH range of 3 to 9 shown in the Figure 8. This indicates the strong force of interaction between the dyes and the various types of Sorel's cement that, either H+ or OH -ions could influence the adsorption capacity. Here the interaction is larger at pH 6 due to the competence of acidic H+ ion with dye cation for the sorption sites. The percentage of sorption increases above this pH value due to the presence of ionic COOH groups. The adsorption of dyes on the activated Sorel's cement does involve ion exchange mechanism. Due to this mechanism there should be an influence on the dye adsorption while varying the pH. The observation shows that by varying the MgO concentration in the Sorel Cement, the adsorption efficiency can be increased.

4. CONCLUSIONS

The experimental data correlated reasonably well with the Langmuir adsorption isotherms and the respective isotherm parameters are calculated for various types of Sorel's cements vs DY17. The amount of dyes adsorbed increases with increase in pH of the medium. Further the efficiency of the adsorbent increase with change in MgO concentration. The amount of the adsorbed DY17 slightly decreases with increasing the ionic strength and increase with the increase in temperature. The dimensionless separation factor shows that the Sorel's cement can be used for the removal of DY17 from aqueous solution.

ACKNOWLEDGEMENT

The authors wishes to thank Mr. P. Venkatesh Raja, Director, S.A. Engineering College and Dr. S. Suyambazhahan, Principal, S.A. Engineering College, Chennai-56 for immense support to carry out the research work.

Table 1: Properties of Sorel's Cement X

Size	0.035 mm
Density	0.7342 gm/cc
Moisture	1.75% (98.25% dried)
Loss on drying	80%
Water soluble matter	0.80%



pH of aqueous solution	8.2
------------------------	-----

Table 2: Equilibrium parameters for the adsorption of Direct Yellow 17 by various concentrations of MgO in Sorel's Cement

Ci	Cf				Qe				% age of Dye removed			
	30	40	50	60	30	40	50	60	30	40	50	60
Sorel's Cement X												
25	5.344	4.906	4.642	4.404	98.27	100.46	101.39	103.91	78.62	80.37	81.43	82.39
50	14.301	12.002	10.121	9.973	178.49	190.00	198.46	201.35	71.40	75.99	79.36	80.06
75	28.431	26.171	22.234	17.432	232.84	244.10	263.90	289.40	62.09	65.11	70.36	76.76
100	49.821	45.712	39.416	31.441	250.90	271.44	302.90	342.80	50.68	54.28	60.58	68.56
Sorel's Cement A												
25	5.5370	5.1062	4.8648	4.6891	97.315	99.469	100.676	101.555	77.9	79.5	80.5	81.3
50	15.6930	13.7610	11.9642	10.7100	170.185	181.195	190.180	196.450	68.1	72.3	76.1	78.6
75	30.7681	28.4420	26.2380	20.4896	221.160	232.800	243.810	272.550	59.0	62.0	65.0	72.7
100	52.4800	48.4673	43.4480	37.8891	237.600	257.663	282.760	310.555	47.5	51.6	57.5	62.2
Sorel's Cement B												
25	5.102	4.862	4.519	4.381	99.48	100.69	102.40	103.10	79.59	80.55	81.92	82.47
50	13.99	11.78	9.230	8.710	180.05	191.10	203.84	206.45	72.02	76.44	81.53	82.58
75	26.71	24.66	20.970	16.220	241.45	251.69	270.15	293.89	64.38	67.11	72.04	78.37
100	47.60	43.70	37.190	30.101	261.99	281.50	314.20	349.49	52.39	59.30	62.84	69.90

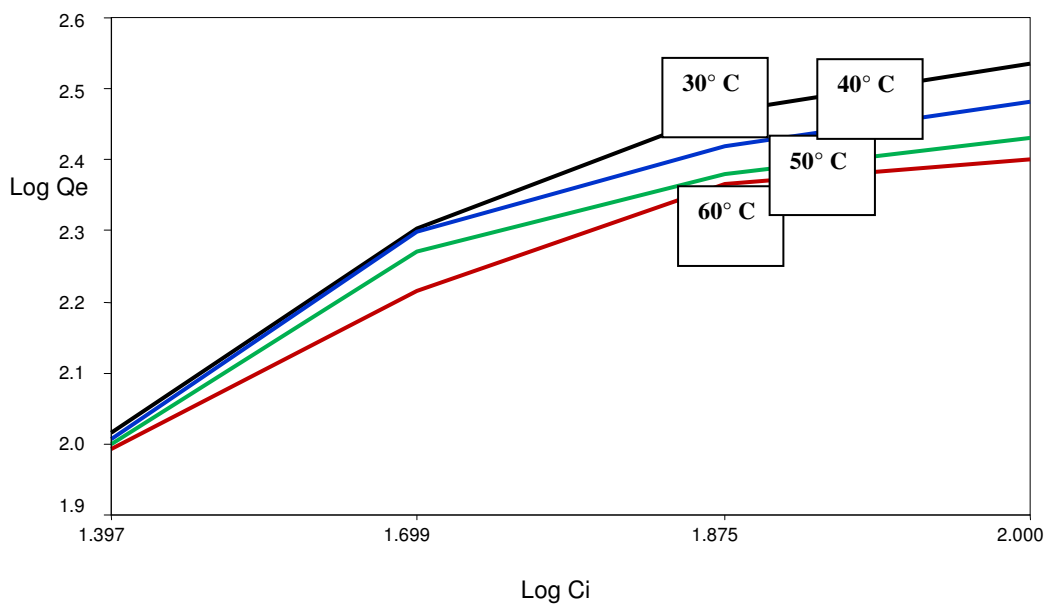


Figure 1: Direct Yellow 17 vs Sorel's Cement X

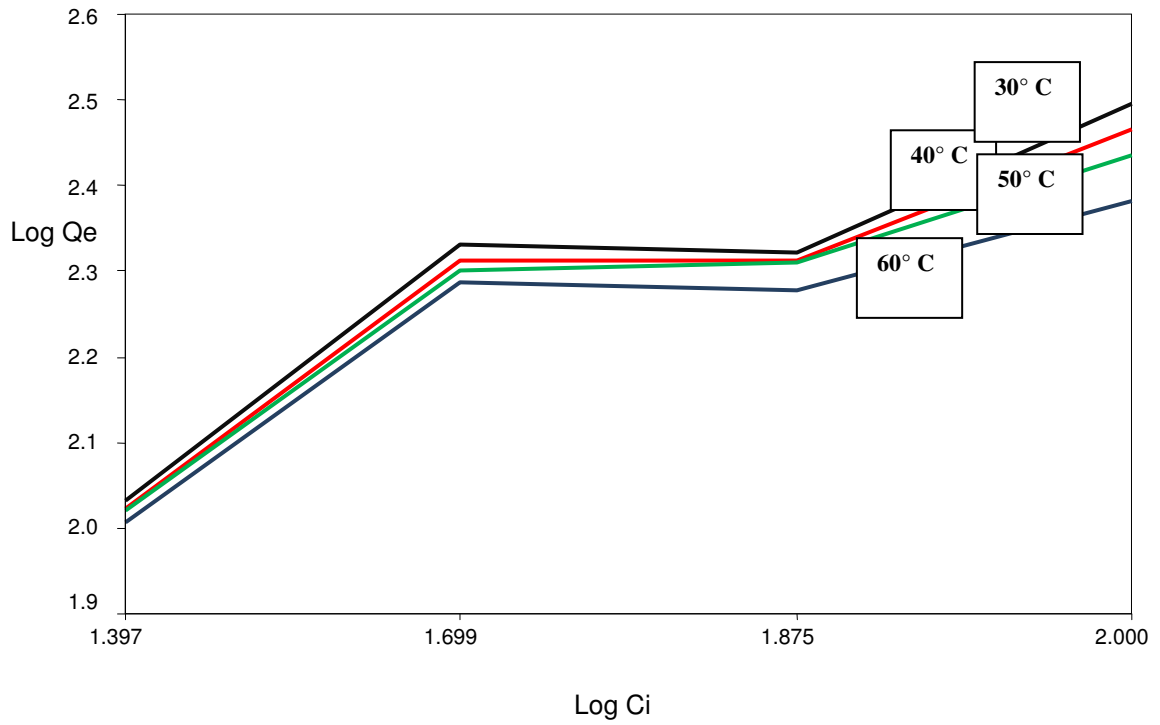


Figure 2: Direct Yellow 17 vs Sorel's Cement (A)

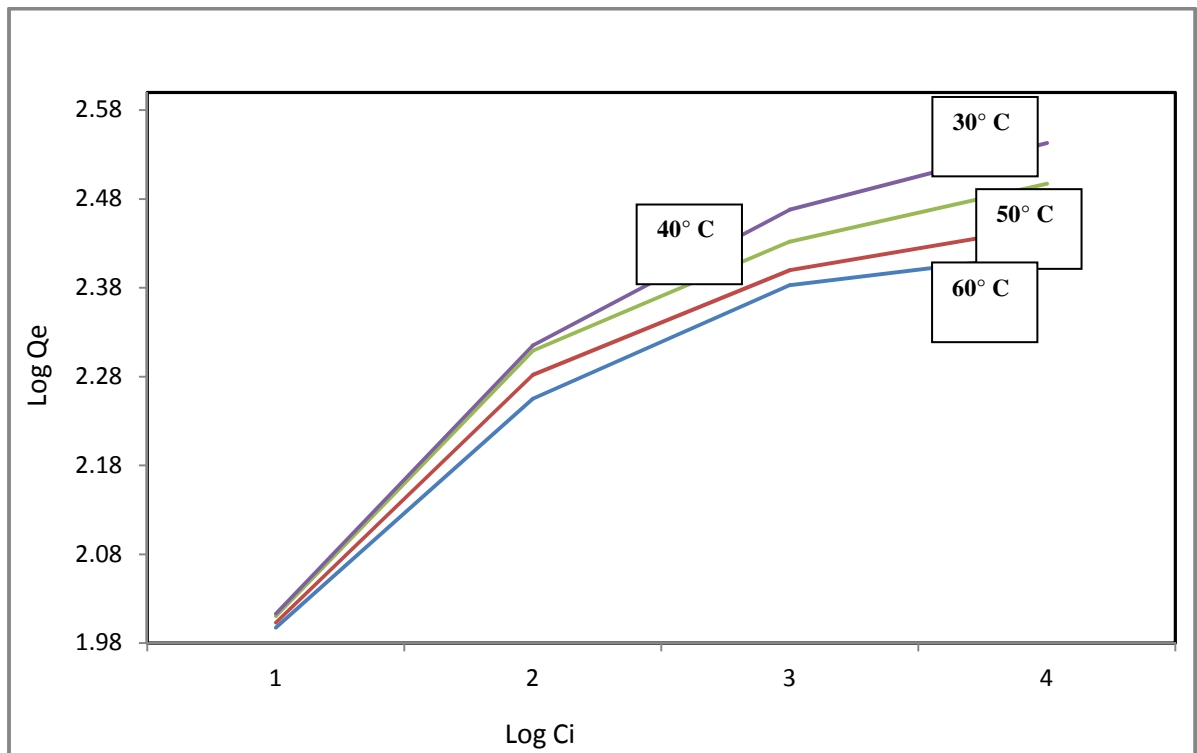
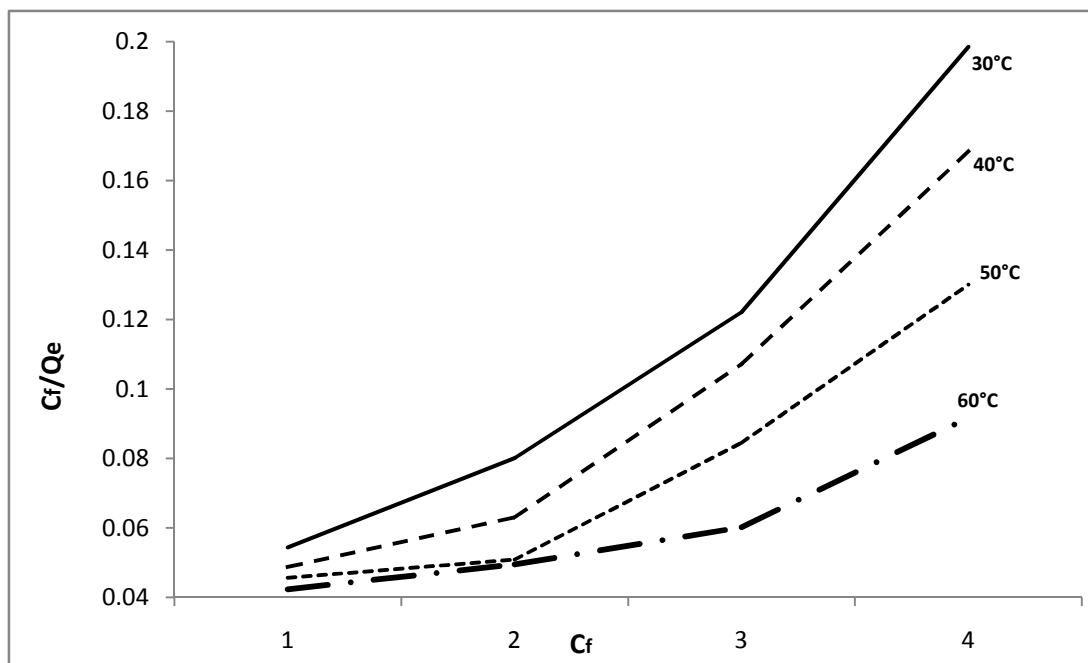


Figure 3: Direct Yellow 17 vs Sorel's Cement (B)

**Table 3 Langmuir Isotherm results of DY 17**

$$C_f/Q_e = 1/Q_m b + C_f/Q_m$$

Sorel's cement	T °C	25 mg/l		50 mg/l		75 mg/l		100 mg/l	
		C _f	C _f /Q _e	C _f	C _f /Q _e	C _f	C _f /Q _e	C _f	C _f /Q _e
X	30	5.344	0.05438	14.301	0.0801	28.431	0.1221	49.821	0.1985
	40	4.906	0.0488	12.002	0.0631	26.171	0.1072	45.712	0.1684
	50	4.642	0.0457	10.121	0.0509	22.234	0.0845	39.416	0.1301
	60	4.404	0.0423	9.973	0.0495	17.432	0.0602	31.441	0.0917
A	30	5.5370	0.05689	15.6930	0.0922	30.7681	0.1391	52.48	0.208
	40	5.1062	0.05133	13.7611	0.0723	28.4420	0.1221	48.467	0.1881
	50	4.8648	0.04832	11.9642	0.0629	26.2380	0.1076	43.448	0.1536
	60	4.6891	0.0461	10.710	0.05451	20.4896	0.059	37.889	0.1220
B	30	5.102	0.0512	13.99	0.0777	26.71	0.1106	47.60	0.1816
	40	4.862	0.04820	11.78	0.0616	24.66	0.0979	43.70	0.1552
	50	4.519	0.0441	9.230	0.0452	20.97	0.0776	31.19	0.1183
	60	4.381	0.0424	8.71	0.0421	16.22	0.0551	30.10	0.0861

**Figure 4: Langmuir isotherm for the adsorption of DY17 by Sorel's cement X**

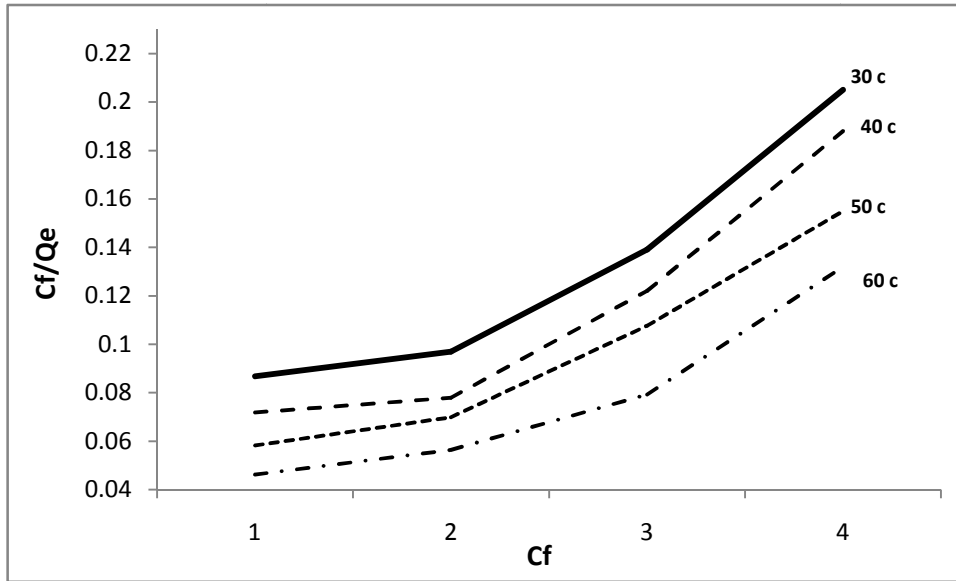


Figure 5: Langmuir isotherm for the adsorption of DY17 by Sorel's cement A

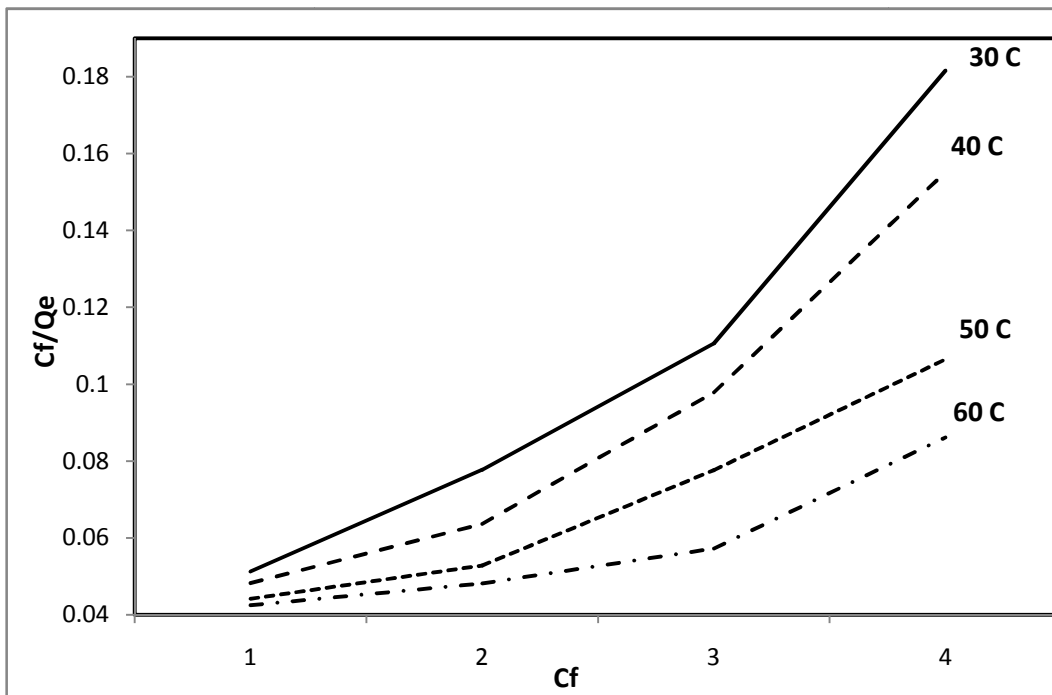


Figure 6: Langmuir isotherm for the adsorption of DY17 by Sorel's cement B

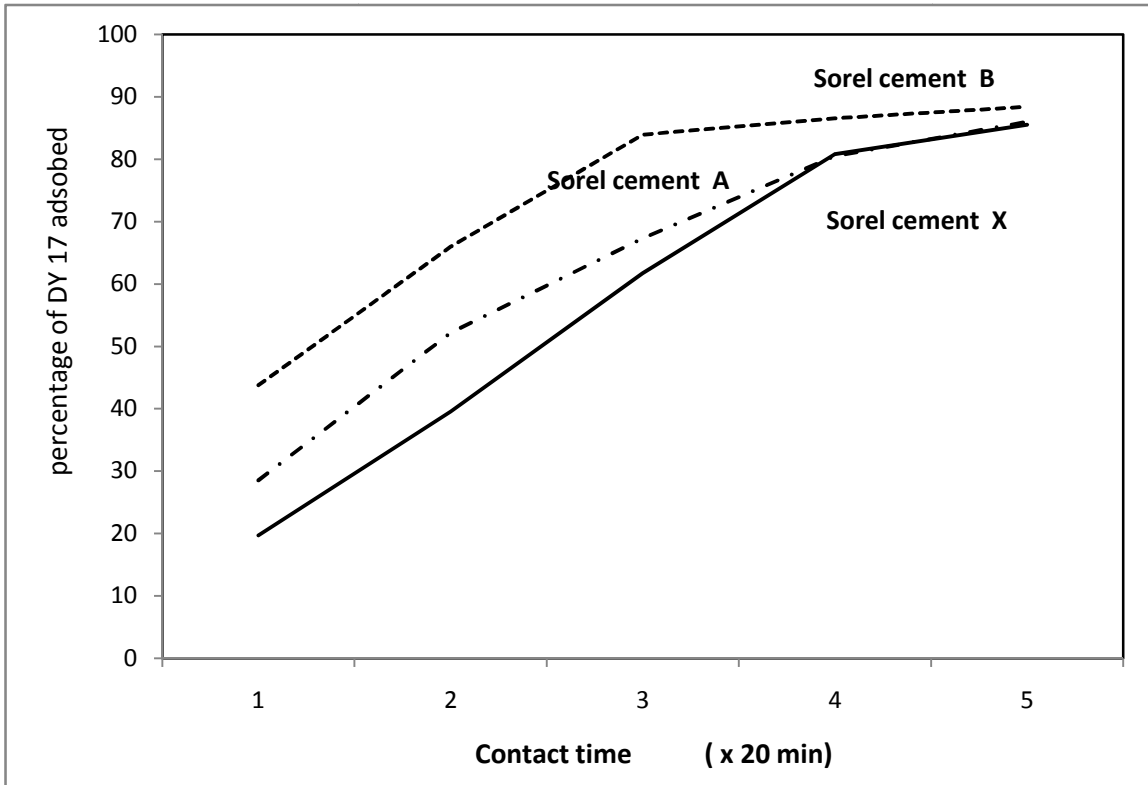


Figure 7: Effect of contact time in the adsorption of DY17 by various types of Sorel's cements

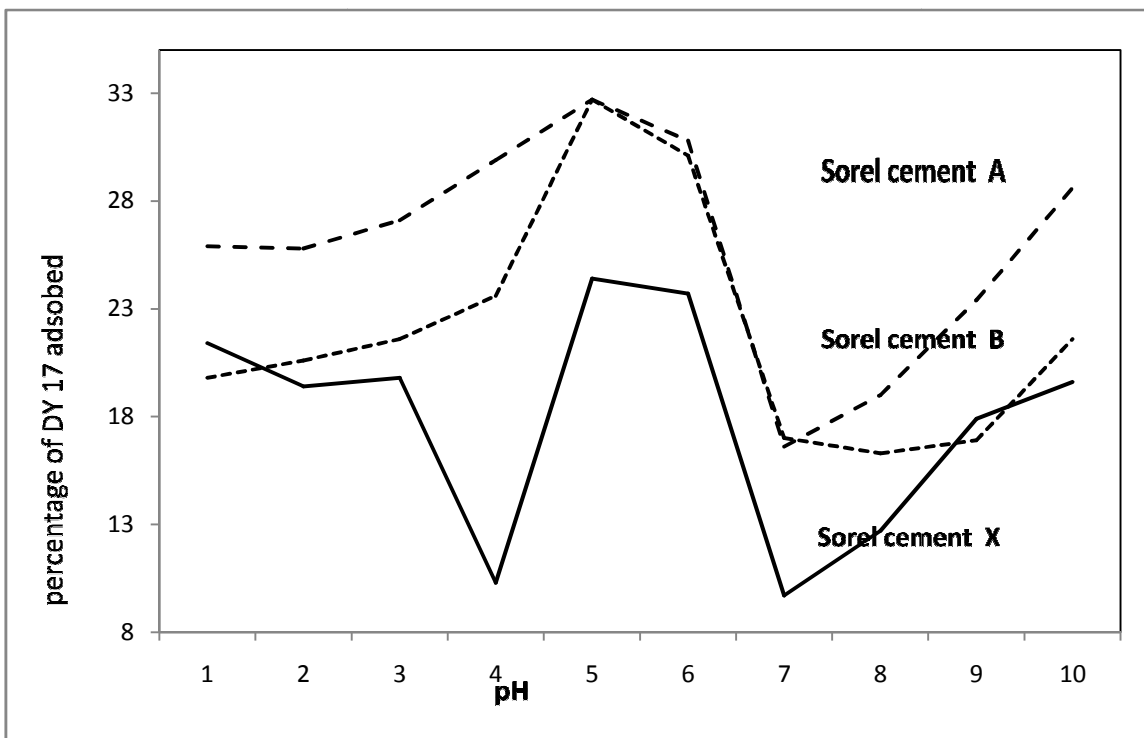


Figure 8: Effect of pH in the adsorption of DY17 by various types of Sorel's cements

**Table 4: Langmuir Isotherm results for Direct Yellow 17**

$$C_f/Q_e = 1/Q_m b + C_f/Q_m$$

Dyes	Temperature °C	Statistical parameters/ constants		
		r	Q _m	b
Sorel's Cement X	30	0.9719	9.3777	0.045
	40	0.9669	9.6016	0.039
	50	0.9524	9.5939	0.030
	60	0.9407	9.6953	0.023
Sorel's Cement A	30	0.937	9.3377	0.038
	40	0.939	9.5661	0.034
	50	0.947	9.5911	0.029
	60	0.950	9.6953	0.022
Sorel's Cement B	30	0.940	9.3997	0.048
	40	0.941	9.6360	0.043
	50	0.947	9.6939	0.039
	60	0.959	9.7353	0.033

Table 5: Dimensionless separation factor (R_L) for Direct Yellow 17

$$R_L = 1/(1+bC_0)$$

Temperature				
Do (mg/L)	30	40	50	60
Sorel's Cement X				
25	0.4646	0.5063	0.5714	0.6349
50	0.3076	0.3389	0.4000	0.4651
75	0.2285	0.2547	0.3076	0.3664
100	0.1818	0.2042	0.2500	0.3030
Sorel's Cement A				
25	0.5128	0.5405	0.5797	0.6451
50	0.3448	0.3703	0.4081	0.4761
75	0.2597	0.2816	0.1410	0.3773
100	0.2083	0.2272	0.2564	0.3125
Sorel's Cement B				
25	0.4545	0.4819	0.5063	0.5479
50	0.2941	0.3174	0.3389	0.3802
75	0.2173	0.2366	0.2547	0.2877
100	0.1724	0.1886	0.2040	0.2325



REFERENCES

- [1] Weber EJ, Stickney VC (1993). Water pollution by synthetic textiles dyes, *Water Res.* 27: 63.
- [2] Anuirudh TS, Sreedhar MK (1999). Mercury (II) adsorption of desorption characteristics of coconut husk based carbon-Kinetics and self diffusion, *Indian. J. Environ. Protect.* 19:8
- [3] Sekaran G, Shanmugasundaram K A, Mariappan M, Raghavan KV (1995). Adsorption of dyes by buffing dust of leather industry, *Indian. J. Chem. Technol.* (2): 311
- [4] Selvarani K (2000). Studies on Low cost Adsorbents for the removal of Organic and Inorganics from Water. Ph D., Thesis, Regional Engineering College, Tiruchirapalli,
- [5] Senthikumar S, Varatharajan PR, Porkodi K, Subburaam C V (2005). Adsorption of methylene blue carbon onto jute fibre carbon, *Colloid.Interface Sci.* 284: 79.
- [6] Langmuir I (1918). Adsorption of gases on plane surfaces of glass, mica and platinum, *J. Am. Chem. Soc.* 40: 1361.
- [7] Khattri SD, Singh MK, (1999). Sorption, recovery of metal ions from aqueous solution using humus, *Indian. J. Chem. Technol.* 3:114.
- [8] Namasivayam C, Yamuna RT (1995). Adsorption of direct red by biogas residual slurry, *Environ. Pollut.* 89 1.
- [9] Hems.M, Arivoli. S (2007), Comparative study on the adsorption kinetics and thermodynamics of dyes onto acid activated low cost carbon, *Int. Jr. Phys. Sciences*, 2 (1): 10